

Presence detector
353-751421-4




- EN** Presence detector P48LR, DALI-2, master, 32-37 m, 360°, for flush mounting (SnapFit), Wieland gesis® 2 x 2 m cable with 5-pol. connectors
- NL** Aanwezigheidsmelder P48LR, DALI-2, master, 32-37 m, 360°, voor inbouw (SnapFit), Wieland gesis® 2 x 2 m kabel met 5-polige connectoren
- FR** Détecteur de présence P48LR, DALI-2, maître, 32-37 m, 360°, à encastrer (SnapFit), câble Wieland gesis® 2 x 2 m avec connecteurs à 5 pôles
- DE** Präsenzmelder P48LR, DALI-2, Master, 32-37 m, 360°, für Deckeneinbau (SnapFit), Wieland gesis® 2 x 2 m Kabel mit 5-poligen Steckern
- DK** Tilstedeværelsessensor P48LR, DALI-2, master, 32-37 m, 360°, planforsænket (SnapFit), Wieland gesis® 2 x 2 m kabel med 5-pol stik
- SE** Närvarosensor P48LR, DALI-2, master, 32-37 m, 360°, för infälld montering (SnapFit), Wieland gesis® 2 x 2 m kabel med 5-poliga kontakter
- NO** Tilstedeværelsessensor P48LR, DALI-2, master, 32-37 m, 360°, til innfelt montering (SnapFit), Wieland gesis® 2 x 2 m kabel med 5-polede kontakter
- IT** Rilevatore di presenza P48LR, DALI-2, master, 32-37 m, 360°, per montaggio a incasso (SnapFit), Wieland gesis® 2 x cavo da 2 m con connettori a 5 poli
- PL** Czujnik obecności P48LR, DALI-2, nadrzędny, 32-37 m, 360°, do montażu podtynkowego (SnapFit), kabel 2 x 2 m ze złączami 5-biegunowymi Wieland gesis®
- SK** Detektor prítomnosti P48LR, DALI-2, master, 32-37 m, 360°, na zapustenú montáž (SnapFit), Wieland gesis® 2 x 2 m kábel s 5-pólovými konektormi

Wiring

Aansluitschema / Schéma de raccordement / Verdrahtung / Tilslutningsskema / Kopplingschema / Ledningstilkopling / Cablaggio / Okablowanie / Instalácia


⚠ This product must be secured with a miniature circuit breaker (MCB) of max. 16 A in the electrical cabinet. The MCB rating is limited by national installation rules.

⚠ DALI power – OFF

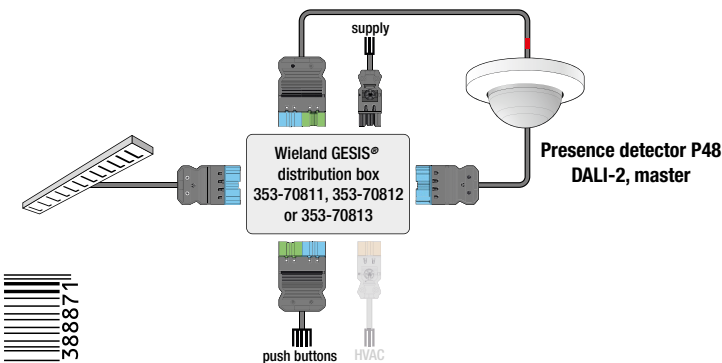

Installation

Installatie / Installation / Installation / Installation / Installation / Installasjon / Installazione / Instalacja / Instalácia

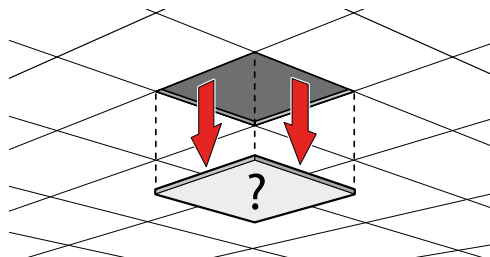


- 1** **NOT REMOVABLE (fixed ceiling)**
Drill Ø 76 mm hole.
Insert detector into ceiling.
2 Push detector into ceiling until it is flush.
OR
Drill Ø 76 mm hole.
Insert detector into ceiling.
3 **a** Lock the detector into the ceiling.
b Lock the detector into the ceiling.
4 **a** **DALI power – OFF**
Lock the detector into the ceiling.
b Lock the detector into the ceiling.
* optional



Detection area

Detectiebereik / Portée de détection / Erfassungsbereich / Rækkevidde / Detekteringsområde / Övervakningsområde / Campo di rilevamento / Obszar wykrywania / Oblasť snímania




H	A Walking	B Across	C Towards	D Presence
2.5 m	∅ 32 m	∅ 28 m	∅ 10 m	∅ 8 m
3.0 m	∅ 37 m	∅ 30 m	∅ 8 m	∅ 5 m
3.5 m	∅ 48 m	∅ 42 m	∅ 8 m	∅ 6 m

Measured according to EN/IEC63180



Dimensions

Afmetingen / Dimensions / Abmessungen / Dimensioner / Mått / Dimensjoner / Dimensioni / Wymiary / Rozmery

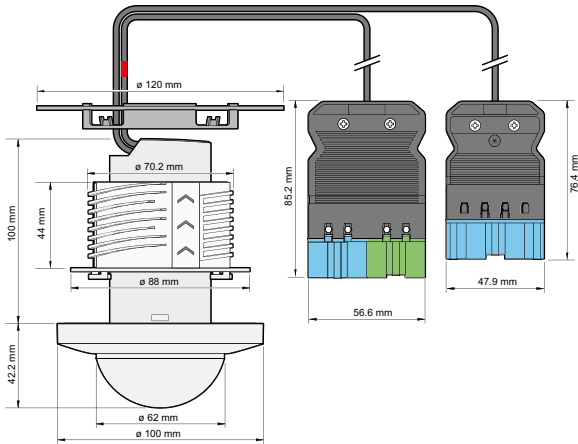

Specifications

Specificaties / Specifications / Spezifikationen / Specifikationer / Specifikationer / Spesifikasjoner / Specifiche / Specyfikacje / Technické údaje

Installation	DALI-2
Configuration	master / standalone
Mounting height	2 – 3.5 m
Wire capacity	1.5 / 2.5 mm ²
Input voltage	230 Vac ± 10 %, 50 Hz
Operating frequency	2.4 GHz
Maximum power consumption	0.6 W
Maximum voltage on the DALI bus	15 Vdc
Maximum supply current*	250 mA
Maximum guaranteed current on the DALI bus	200 mA
Maximum startup time DALI	< 1200 ms
Maximum PIR detection startup time	70 s
Maximum number of control gear on the DALI bus	64
Maximum number of dimmable zones	4
Maximum radio frequency power	-2 dBm
Ambient temperature	-25 – +40 °C
Protection degree	IP20
Impact resistance	IK04
Halogen free	yes
Marking	CE
Cable specifications	
Cable 1 colour	black
Cable 2 colour	black with red shrink tube
Length	2 m
Wire cross-section	1.5 mm ²
Voltage	250 V
Rated current	16 A
Halogen free	yes
Ambient temperature	-5 – +70 °C
Type of connector cable 1	male, 5-pole, blue
Type of connector cable 2	male, 6-pole, blue/green

* It is not permitted to connect additional DALI power supplies to the DALI bus of the DALI-2 master detectors.

App settings & more info

App-instellingen / Réglages de l'appli / App-Einstellungen / App indstillinger / Appställningar / App-innstillinger / Impostazioni dell'app / Ustawienia aplikacji / Nastavenia aplikácie



DALI power – ON



The specific hardware manual for this product is available in multiple languages on guide.niko.eu

LED behaviour

Ledgedrag / Comportement des LED / LED-Verhalten / LED funktioner / LED-funktioner / LED-funksjon / Comportamento del LED / Zachowanie LED / LED signalizácia



DALI power – ON

Green LED continuous on	●	Connection OK	
Green LED breathing	●	Connection OK, overrule ON	
Green LED flashing	●	Warming up*	Wait
Red LED continuous on	●	Error	More info**:
Red LED flashing	●	Warning	
Blue LED flashing	●	Walk test active	

* When Bluetooth® communication is disabled, the green LED does not flash while warming up.
** More info / Meer informatie / Plus d'info / Mehr Info / Mere info / Mer information / Mer info / Ulteriore info / Więcej informacji / Viac informácií

Support & contact

nv Niko sa
Industriepark West 40
9100 Sint-Niklaas, Belgium

www.niko.eu

EN	+32 3 778 90 80	support@niko.eu
NL	België: +32 3 778 90 80	support.be@niko.eu
	Nederland: +31 880 15 96 10	support.nl@niko.eu
FR	Belgique: +32 3 778 90 80	support.be@niko.eu
	France: +33 820 20 66 25	support.fr@niko.eu
	Suisse: +41 44 878 22 22	support.ch@niko.eu
DE	Deutschland: +49 7623 96697-0	support.de@niko.eu
	Schweiz: +41 44 878 22 22	support.ch@niko.eu
	Österreich: +43 1 7965514	support.at@niko.eu
	Belgien: +32 3 778 90 80	support.be@niko.eu
DK	+45 74 42 47 26	support.dk@niko.eu
SE	+46 8 410 200 15	support.se@niko.eu
NO	+47 66 77 57 50	support.no@niko.eu
IT	+41 44 878 22 22	support.ch@niko.eu
PL	+48 509 378 373	support.pl@niko.eu
SK	+421 2 63 825 155	support.sk@niko.eu

Niko prepares its manuals with the greatest care and strives to make them as complete, correct and up to date as possible. Nevertheless, some deficiencies may subsist. Niko cannot be held responsible for this, other than within the legal limits. Please inform us of any deficiencies in the manuals by contacting Niko customer services at support@niko.eu