

Installation Instructions

Swiss Garde Hokuspokus KNX/KLR



Item no.	Model	EAN
(351-) 25010	SG Hokuspokus KNX/KLR	3505100250104

Motion detector 360° KNX/KLR

Ultra-flat mini KNX motion detector with constant light control

The motion detector **Swiss Garde Hokuspokus KNX/KLR** is characterised by the following outstanding features:

- **2-channel constant light control**
The in-built 2-channel constant light control can be easily adjusted to meet any customer's needs.
The two light channels can be controlled via a parametrizable offset (-50%, synchronous, +50%) using different light values.
- **1 light output** for switching, dimming or scenery selection.
- **Standby light**
If the light channel is set to *dimming absolute*, an emergency standby light can be programmed using the standby value [%] and standby duration [min/h]. Two value pairs can be read out from the KNX bus.
- **1 HVAC-channel** controls heating, ventilation and air conditioning. This output can be used for presence detection.
Additionally, alarm systems with parametrizable switch-on delay can be implemented.
- **1 brightness output** in lux (2 Byte)
- **2 Pyro detectors**
Two PIR sensors with an elliptic 360° detection area can be activated individually or in pairs.

Important notice

The motion detector Swiss Garde Hokuspokus KNX/KLR is suitable for ceiling mounting and for IP54, class II protection rating. In case of errors such as continuous light, uncontrolled switching, etc., please consult page 7 „troubleshooting“.

Function

The motion detector Swiss Garde Hokuspokus KNX/KLR reacts to heat radiation of moving bodies. A person approaching the monitored area automatically triggers the connected light. If no motion is detected again, the light will automatically switch off after a delay time configured in ETS. In case of activated standby, the light will stay on at reduced intensity during the set time period (mode *dimming complete / constant light control*).

Application notes


A detailed description of the communication objects and all parametrizable functions can be found in the following separate document:

Swiss Garde Hokus Pokus KNX/KLR (351- 25010)

APPLICATION DESCRIPTION


Flush-mounting execution

Mounting of the detector in a cut-out. Ensure that connecting cables are not exposed to tension or mount strain relief.




Flush-mounting box DA

Using the DA flush-mounting box, the Hokuspokus KNX/KLR detector can be mounted in a standard flush-mounting box or cut-out size I.



PIR- sensors numbering scheme / LEDs

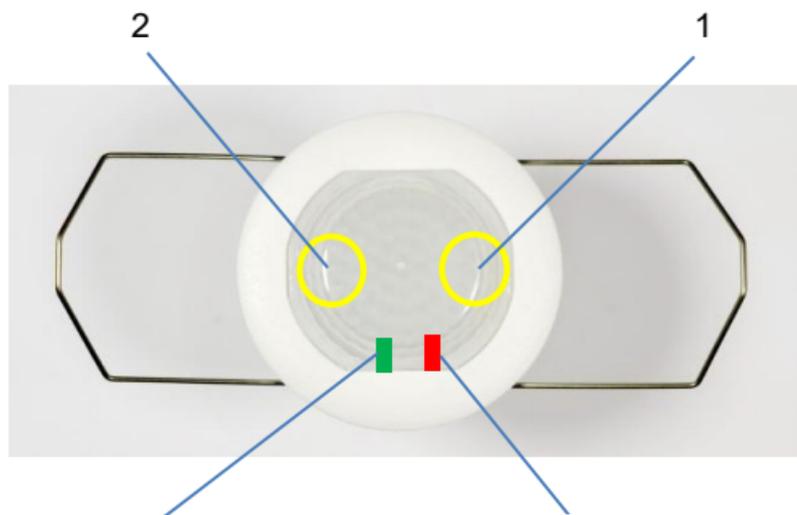

LED motion;
flashes once with
each detection

LED programming;
glows if device is in
programming mode

Connector plugs

The motion detector Hokuspokus KNX/KLR comes with a special pair of connector plugs.

The spring plug is mounted on the detector's connection cable. The connector needs to be connected to the green KNX bus cable (red/black connection wires).

Connector



Spring plug (on detector)



Installation

Open the housing of the connector carefully and strip the wires of the KNX bus cable (8 mm length).

red wire (+) to be connected to red terminal

black wire (-) to be connected to black terminal


Programming




Run the magnet gently across the lens to enter programming mode (red LED is glowing). The detector's physical address can now be programmed (via ETS).

Detection range

The dense 360° elliptic detection area allows for an optimal function. The range depends on the mounting height as well as the angle of approach (high sensitivity when crossing a switching segment). Since the device registers the temperature differences between the source of heat and the ambient temperature, the detection range may vary depending on site conditions (floor heating, etc.).

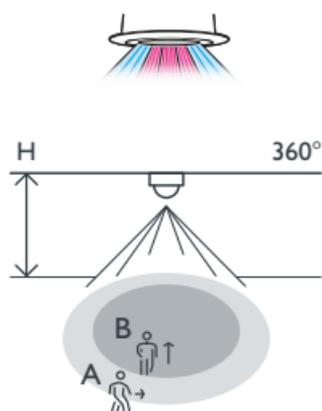

H	A Across	B Towards
2 m	4 x 5 m	2 x 2.5 m
3 m	5 x 6 m	2.5 x 3 m
4 m	6 x 8 m	3 x 5 m
5 m	7 x 10 m	3.5 x 5 m

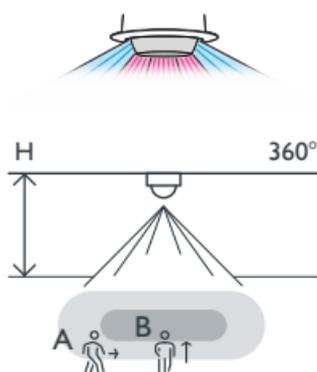

H	A Across	B Towards
2.5 m	4 x 14 m	12 x 7 m
3 m	5 x 16 m	2.5 x 8 m

Troubleshooting

Error

load doesn't switch ON

Cause/remedies

- twilight value set to high
- check light/luminaire/fuses

Detector triggers ON and OFF without reason or light never turns OFF:


- check detection area for potential causes of false triggering: animals, heating, etc. may all do faulty switching
- check distances to lamps (heat-reflection or direct light influence)
- detector is too sensitive, reduce the detection range sensitivity (1...10) via ETS.

Turns the ON during daytime:

- twilight adjustment set to high: set to a lower value via ETS (menu light)

After KNX/EIB bus connection: the detector takes approx. 1 min. to reach a stable working condition!

Device dimension

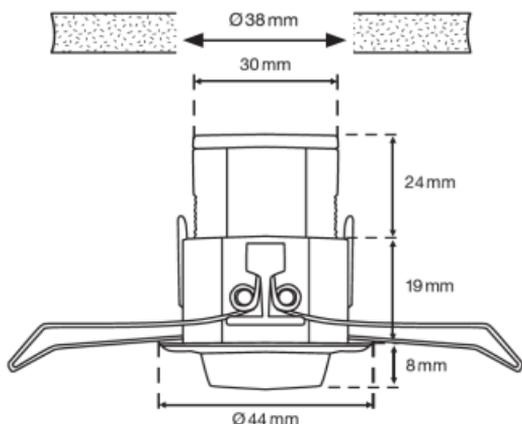

Technical data

nominal voltage:	24V DC (21 - 30V DC)
power consumption:	0,3 W
PIR sensors:	2 Pyro detectors
sensitivity:	adjustable via ETS in 10 steps
light measuring:	5 - 2000 Lux
lux value:	lux value readable (2 Byte)
switching criteria:	motion and brightness
detection range:	360° elliptic approx. 14 m length, 8 m width at 3 m height
recom. mounting height:	approx. 2 to 5 m
protection rating:	IP 54, class II
temperature range:	-20 °C to +40 °C
dimensions:	Ø 44 x 1- 8mm, visible in the ceiling
drilling hole:	Ø 38 mm
settings:	all values parametrizable via ETS