

Presence detector, DALI, secondary, 12 m, flat, for flush mounting, white

350-41659

4 year warranty

This presence detector (DALI daylight control, secondary) is suitable for flush-mounting in ceilings with a height of 2.4 – 3 m and can only be used in combination with a master to increase its detection range. The detector has a very flat design of only 5 mm, so that it can be mounted almost flush with the ceiling. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. A maximum of ten secondary detectors can be connected per master.

Finishing colour: white


Compatible master detectors: 350-41650, 350-41657, 350-41680

- All-in-one solution
- Fast, flexible installation thanks to the addressable DALI bus
- Easy to mount thanks to its spring clamps
- It can be integrated practically level on the ceiling thanks to its ultra-flat design of barely 5 mm.

For use in offices, school establishments, meeting rooms, etc., in rooms of all dimensions



Detection range



H	A Across	B Towards	C Presence
2.5 m	Ø 8 m	Ø 4 m	Ø 3 m
3 m	Ø 12 m	Ø 6 m	Ø 4 m



DALI



secondary



360°



Ø 12 m from
a height of
3 m



2.5 – 3 m



flush-
mounting

niko


Technical data

Article number	350-41659
Compatible master detectors	350-41650, 350-41657, 350-41680
Configuration	secondary
Input voltage	via the DALI bus
Detector output	DALI
Detection angle	360°
Detection range (PIR)	ø 12 m from a height of 3 m
Ambient temperature	-5 – +40 °C
Mounting method	flush-mounting
Mounting height	2.5 – 3 m
Drill diameter	77 mm
Dimensions visible (HxWxD)	95 x 95 x 5 mm
Dimensions (HxWxD)	95 x 95 x 95 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	IR remote control
Marking	CE

Accessories

350-41936	Universal remote control for smartphone
350-41934	IR remote control for installers

Dimensions

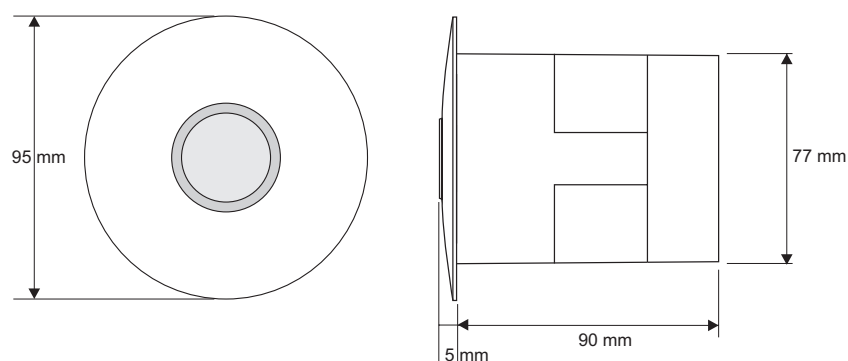

Wiring diagram

