

# Swiss Garde 360 Premium for surface mounting, 30 m, round, white

351-25050

4 year warranty

Motion detector with broad range. Ideal for garages and storage rooms. High-performance relay and large connection space for the wiring.  
Finishing colour: white


- High IP value (IP55)
- Separate setting for the lux, the switch-off delay and the sensitivity

Motion detector for use in cellars, garages, damp rooms, etc.

- The lighting remains on while there is motion.
- Can be programmed manually or using the optional remote control.
- The presence of three PIR sensors in the detector makes detection extremely precise.



## Detection range



H	A Across	B Towards
2 m	Ø 20 m	Ø 10 m
3 m	Ø 26 m	Ø 13 m
4 m	Ø 28 m	Ø 14 m
5 m	Ø 30 m	Ø 15 m
6 m	Ø 30 m	Ø 15 m
7 m	Ø 30 m	Ø 15 m
8 m	Ø 30 m	Ø 15 m

  
230 V

  
stand-alone

  
360°

  
Ø 26 m from  
a height of  
3 m

  
2 – 8 m

  
surface  
mounting

**niko**


## Technical data

Article number	351-25050
Configuration	stand-alone
Input voltage	230 Vac $\pm$ 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum power consumption	0.9 W
Maximum current consumption	3.91 mA
Maximum MCB rating	10 A (limited by national installation rules)
Relay contact	N.O. (max. 10 A)
Maximum load incandescent and halogen lamps ( $\cos\phi = 1$ )	2300 W
Maximum load fluorescent lamps ( $\cos\phi \geq 0.5$ )	1150 VA
Maximum load economy lamps (CFLi)	350 W
Maximum load LED lamps 230 V	350 W
Maximum load LED driver	350 VA
Maximum load electronic transformer	1150 VA
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Switch-off delay	pulse, 10 s – 20 min
Detection angle	360°
Detection range (PIR)	ø 26 m from a height of 3 m
Ambient temperature	-20 – +55 °C
Mounting method	surface mounting
Mounting height	2 – 8 m
Dimensions (HxWxD)	125 x 125 x 75 mm
Protection degree	IP55
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control
Marking	CE

## Accessories

350-41936	Universal remote control for smartphone
351-25320	IR remote control
351-25310	IR remote control for users

## Dimensions

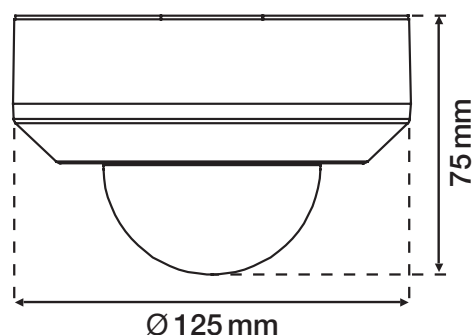

## Wiring diagram

