

Light sensor, 24 V, 3 lux – 60000 lux, IP54, grey

350-10012

4 year
warranty

This photo cell is used in combination with a daylight control module (360-35010). The light sensitivity can be set from 3 to 300 lx, from 30 lx to 3 klx, from 300 lx to 30 klx or from 600 lx to 60 klx. This photo cell is suitable for outdoor applications and has an IP54 protection degree. Finishing colour: grey



- Sustainable, functional, reliable
- Simple installation
- Small, discreet
- Adjustable light sensitivity:
 - 3 – 300 lux
 - 30 – 3,000 lux
 - 300 – 30,000 lux
 - 600 – 60,000 lux
- IP54

Photo cell to measure the daylight that enters the room

- The light sensor measures the daylight that enters the room and sends a 0-10 V signal corresponding to the connected daylight control module.
- Can also be combined with the Niko Home Control analogue sensor module (550-00230).



24V



surface
mounting


niko

350-10012 - 10-03-2025

Technical data

| | |
|-----------------------|-------------------|
| Article number | 350-10012 |
| Input voltage | 24 Vdc \pm 10 % |
| Detector output | 0-10 V |
| Light intensity range | 3 lux – 60000 lux |
| Number of channels | 1 channel |
| Ambient temperature | -40 – +50 °C |
| Mounting method | surface mounting |
| Dimensions (HxWxD) | 52 x 52 x 34.5 mm |
| Protection degree | IP54 |
| Impact resistance | IK02 |
| Marking | CE |

Dimensions

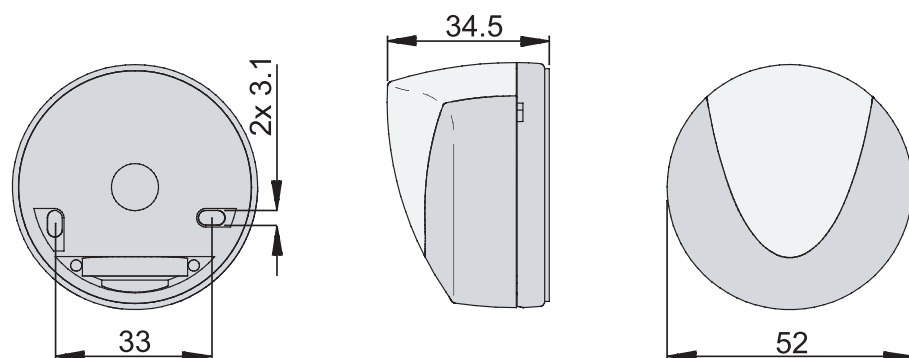

Wiring diagram

