

Swiss Garde 360 Presence Secondary, 16 m, round, white

351-25459

4 year warranty


Secondary presence detector for range extension of Swiss Garde master ceiling and wall detector.
 Surface mounting possible with accessories; IP20/IP44/IP55.
 Finishing colour: white
 Compatible master detectors: 351-25451, 351-25457, 351-25463, 351-25467, 351-25475

- Low consumption (0.25 W)
- Surface-mounting boxes available separately

Presence detector for the stairwell, cellar, small meeting rooms, etc.



Detection range



H	A Across	B Towards	C Presence
2 m	ø 10 m	ø 5 m	ø 4 m
2.5 m	ø 12 m	ø 6 m	ø 5 m
3 m	ø 14 m	ø 7 m	ø 6 m
3.5 m	ø 16 m	ø 8 m	ø 7 m
4 m	ø 16 m	ø 8 m	ø (8) m
5 m	ø 16 m	ø 8 m	ø (8) m
6 m	ø 16 m	ø 8 m	ø (8) m

230 V

secondary

360°

ø 14 m from a height of 3 m

2 – 6 m

flush-mounting box

niko


Technical data

Article number	351-25459
Compatible master detectors	351-25451, 351-25457, 351-25463, 351-25467, 351-25475
Configuration	secondary
Input voltage	230 Vac \pm 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum power consumption	0.3 W
Maximum current consumption	1.3 mA
Maximum MCB rating	10 A (limited by national installation rules)
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Detection angle	360°
Detection range (PIR)	ø 14 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting box
Mounting height	2 – 6 m
Dimensions visible (HxWxD)	105 x 105 x 35 mm
Dimensions (HxWxD)	105 x 105 x 71 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control
Marking	CE

Accessories

351-25420	Surface-mounting box, white
351-25330	Cover plate, white

Dimensions

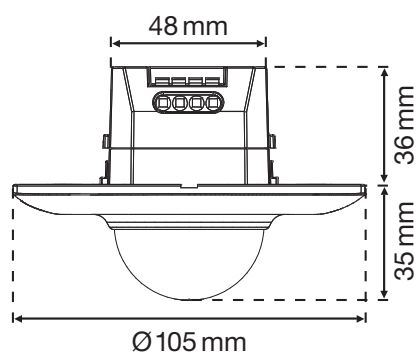

Wiring diagram

