

# Motion detector, DALI, secondary, 32 m, IP54, for high ceilings, for flush mounting, white

350-41762

4 year warranty

This motion detector (DALI daylight control, secondary) is suitable for flush-mounting in ceilings with a height of 4 – 8 m and can only be used in combination with a master to increase its detection range. The device follows the settings of the master. The sensitivity of the secondary detector, though, can be set separately. A maximum of ten secondary detectors can be connected per master.


Finishing colour: white

Compatible master detectors: 350-41750, 350-41751, 350-41760, 350-41761, 350-41780, 350-41781

- All-in-one solution
- Large detection range of 32 m
- Can be programmed using the IR remote control 350-41934
- Fast, flexible installation thanks to the addressable DALI bus
- Replacement of a faulty DALI frame without reprogramming



## Detection range



H	A Across	B Towards
4 m	Ø 16 m	Ø 9.6 m
5 m	Ø 20 m	Ø 12 m
6 m	Ø 24 m	Ø 14.4 m
7 m	Ø 28 m	Ø 16.8 m
8 m	Ø 32 m	Ø 19.2 m



DALI



secondary



360°



Ø 32 m from  
a height of  
8 m



4 – 8 m



flush-  
mounting

**niko**


## Technical data

Article number	350-41762
Compatible master detectors	350-41750, 350-41751, 350-41760, 350-41761, 350-41780, 350-41781
Configuration	secondary
Input voltage	via the DALI bus
Detection angle	360°
Detection range (PIR)	ø 32 m from a height of 8 m
Ambient temperature	-5 – +50 °C
Mounting method	flush-mounting
Mounting height	4 – 8 m
Drill diameter	88.5 mm
Dimensions visible (HxWxD)	100 x 100 x 46.4 mm
Dimensions (HxWxD)	100 x 100 x 136.4 mm
Protection degree	IP54
Impact resistance	IK04
Marking	CE

## Accessories

350-41936	Universal remote control for smartphone
350-41934	IR remote control for installers

## Dimensions

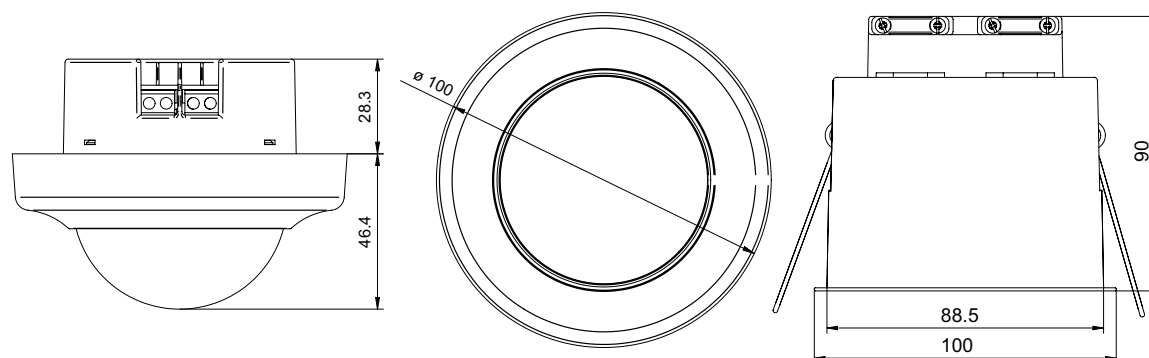

## Wiring diagram

