

# Presence detector, 230 V, secondary, 26 m, round, for flush-mounting box, white

351-25469

4 year warranty

The presence detector for flush mounting in ceilings is suitable for switching the indoor lighting on and off. Automatic on/off (presence detector) or manual on/automatic off (absence detector). The detection area can be divided by means of an adjustable cover mask. Use exclusively in combination with a master.

Finishing colour: white


Compatible master detectors: 351-25451, 351-25457, 351-25463, 351-25467, 351-25475

- Low consumption (0.25 W)
- Surface-mounting boxes available separately

Presence detector for large meeting rooms, canteens, etc.



## Detection range



H	A Across	B Towards	C Presence
2 m	ø 20 m	ø 10 m	ø 5 m
3 m	ø 26 m	ø 13 m	ø 7 m
4 m	ø 28 m	ø 14 m	ø 9 m
5 m	ø 30 m	ø 15 m	ø 10 m
6 m	ø 30 m	ø 15 m	ø 10 m
7 m	ø 30 m	ø 15 m	ø 10 m
8 m	ø 30 m	ø 15 m	ø 10 m



230 V



secondary



360°



ø 26 m from a height of 3 m



2 – 8 m



flush-mounting box

**niko**


## Technical data

Article number	351-25469
Compatible master detectors	351-25451, 351-25457, 351-25463, 351-25467, 351-25475
Configuration	secondary
Input voltage	230 Vac $\pm$ 10 %, 50 Hz
Detector output	230 V (ON/OFF)
Maximum power consumption	0.3 W
Maximum current consumption	1.3 mA
Maximum MCB rating	10 A (limited by national installation rules)
Light intensity range	5 lux – 2000 lux
Number of channels	1 channel
Detection angle	360°
Detection range (PIR)	ø 26 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting box
Mounting height	2 – 8 m
Drill diameter	48 mm
Dimensions visible (HxWxD)	105 x 105 x 50 mm
Dimensions (HxWxD)	105 x 105 x 86 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	Potentiometers or IR remote control
Marking	CE

## Accessories

351-25420      Surface-mounting box, white

## Dimensions

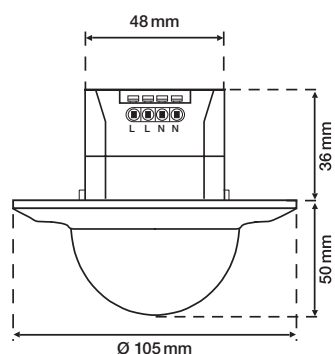

## Wiring diagram

