

Transponder reader module for modular external unit

10-364

4 year
warranty

The transponder reader module is used as a door opening function. Up to 250 transponder keys can be programmed. When reading the key, you receive visual and acoustic feedback. The programming of the system is password-protected. The module is made of black plastic.

The transponder reader module includes an IR remote control.

Technical data

Transponder reader module for modular external unit


- dimensions: 105 x 105 x 26 mm (HxWxD)
- finishing colour: black plastic
- ambient temperature: -10°C to +50°C
- protection degree: IP44
- vandal proof: yes
- input current in standby: $I(a) = 0.1 \text{ mA}$, $I(P) = 11 \text{ mA}$
- max input current: $I(P_{\text{max}}) = 25 \text{ mA}$
- power supply voltage: $+24\text{V} \pm 8\%$ (18-28V in stand-alone)
- wire technique: 2- or 3-wired
- marking: CE
- up to 250 transponder keys can be programmed
- MIFARE Classic® 1K / 4K technology
- door opening function with potential-free relay contact
- visual and acoustic feedback after code is entered
- LEDs for status indication
- password protection against unauthorized configuration
- configurable with Niko Configuration SW for access control
- Marking: CE



niko

10-364 - 08-01-2024

Dimensions

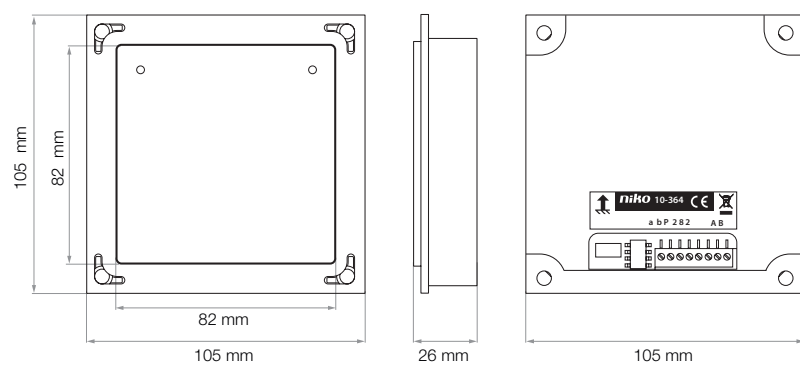

Wiring diagram

