

Swiss Garde mini motion detector 360°, 16 m, KNX, for flush mounting, IP54

351-25010

4 year warranty

The mini motion detector with two PIR elements is only compatible with KNX. Programming takes place via the software (e.g. ETS4). This detector can switch 2 channels on and off. The detector is equipped with an integrated light sensor.


- Combination of master/secondary possible
- Very compact design
- High IP value (IP54)

Motion detector for use in applications such as toilets, dressing rooms, etc.

- Everything can be programmed using ETS software
- Very simple programming
- The detector can be places in two positions:
 - Flush in the ceiling (design)
 - Slightly exceeds the housing (maximum range)
- 2 channels for setting by heliometer
 - 1 channel for turning the lighting on and off
 - 1 channel for turning the HVAC installation on and off



Detection range



H	A Across	B Towards
2 m	4 x 5 m	2 x 2.5 m
3 m	5 x 6 m	2.5 x 3 m
4 m	6 x 8 m	3 x 5 m
5 m	7 x 10 m	3.5 x 5 m



KNX



master



360 °



half circle,
16 m from
a height of
3 m



2 – 5 m



flush-
mounting

niko


Technical data

Article number	351-25010
Configuration	master
Input voltage	30 Vdc via KNX-bus
Detector output	KNX
Light intensity range	5 lux – 2000 lux
Number of channels	2 channels
Detection angle	360 °
Detection range (PIR)	half circle, 16 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting
Mounting height	2 – 5 m
Drill diameter	37 mm
Dimensions visible (HxWxD)	8 mm
Dimensions (HxWxD)	44 x 44 x 51 mm
Protection degree	IP54
Marking	CE

Accessories

351-25013	Flush-mounting box set
-----------	------------------------

Dimensions

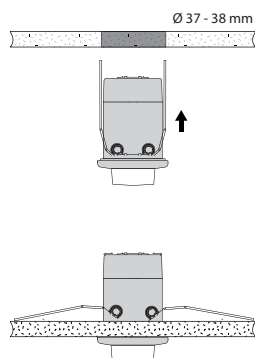

Wiring diagram