

LED compensator for dimmers

310-05000

4 year
warranty

The power compensator is used with low power light sources such as LED lamps when ghosting or lamp flicker is seen with a 2-wire dimmer. The compensator will have to be installed parallel over one LED lamp, between the switch wire and neutral wire. The lamp compensator will not solve all challenges with low power lamp loads since the internal LED lamp electronics is never standard. Also PLC interference effects that cause flicker symptoms in certain EU countries, will not be blocked by this product.




Technical data

- input voltage: 230 Vac \pm 10 %, 50 Hz
- maximum power consumption: until 1,4 W
- dimensions (HxWxD): 21.6 mm x 31 mm x 13 mm
- weight: 17 g
- operating temperature: 0 - 35 ° C
- protection degree: IP40



Dimensions

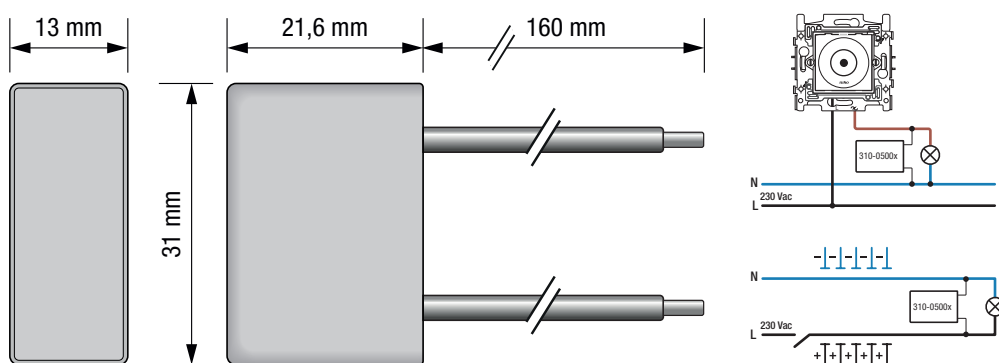

Wiring diagram

