

# Presence detector, KNX®, 4 channels, 16 m, for flush-mounting box

351-25039

4 year warranty

The presence detector with four channels and daylight control for flush-mounting box in ceilings is suitable for switching the indoor lighting on and off. The detector is equipped with an integrated light sensor and is only compatible with KNX®. Finishing colour: white


- Combination of master/secondary possible
- Can be placed at a height of up to 8 metres
- - Very good and sensitive detection

Presence detector for use in meeting rooms, offices, etc.

- Everything can be programmed using ETS software
- Very simple programming
- Can be programmed as a presence or absence detector
- 2 channels for setting by heliometer
  - 1 channel for turning the lighting on and off
  - 1 channel for turning the HVAC installation on and off



Detection range




D			
2 m	5 m	6 m	12 m
3 m	7 m	8 m	16 m
4 m	9 m	9 m	18 m
5 m	10 m	10 m	20 m
6 m	10 m	11 m	22 m
7 m	10 m	11 m	22 m
8 m	10 m	11 m	22 m

## Technical data

Article number	351-25039
Configuration	master/secondary
Input voltage	30 Vdc via KNX®-bus
Detector output	KNX®
Maximum power consumption	0.3 W
Maximum current consumption	10 mA
Light intensity range	10 lux – 2000 lux
Number of channels	4 channels
Switch-off delay	1 s – 4 h
Detection angle	360°
Detection range (PIR)	ø 16 m from a height of 3 m
Ambient temperature	-20 – +40 °C
Mounting method	flush-mounting
Mounting height	2 – 8 m
Dimensions visible (HxWxD)	120 x 120 x 37 mm
Dimensions (HxWxD)	120 x 120 x 49 mm
Protection degree	IP20
Impact resistance	IK02
Modification of settings	ETS software
Marking	CE

## Dimensions

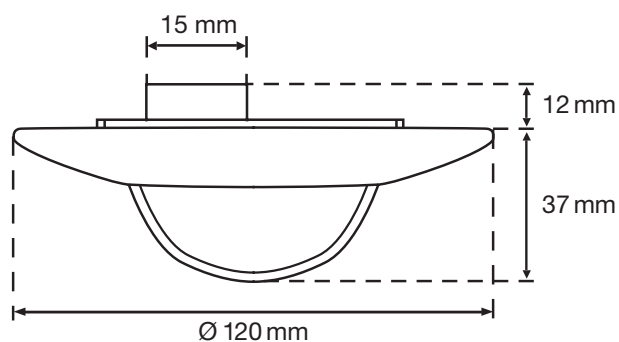

## Wiring diagram

