

Splashproof garden post with double socket outlet, side earthing and spike, white

701-36825

4 year warranty

The garden post includes two socket outlets (16 A/250 Vac) with side earthing, shutters and plug-in terminals. It has an IP55 protection degree and is equipped with a spike that needs to be driven directly into the earth. Its functional and beautiful design makes the garden post a perfect fit for outdoor areas, such as on terraces and in outdoor kitchens. Moreover, the entire unit is splashproof, which makes it extremely well-suited for use in damp areas and ammonia-rich environments.

Wires that remain fixed:

- wire is fixed firmly due to the high-quality plug-in terminal with a long life span, tested according to the norm
- since the conductor release on the mechanisms is located at the front, the wiring cannot push on the release when you place it in the box

Faster and easier installation:

- all connections terminals are located at the top of the base:
 - to ensure all wires can be cut and stripped at the same length
 - to guarantee more space under the mechanism, so you can easily fold the wires and place the mechanism in the box without the wiring pushing it back up.

Niko quality:

- long life span since the plug-in terminal stays within the limits of the norm during a temperature and power drop



Technical data


Splashproof garden post with double socket outlet, side earthing and spike, white. Handmade product: small deviations in form may occur

- Function: – socket outlet
 - contact buses with a large contact surface that do not rest on the base in order to be connected
- Maximum MCB rating: 16 A (1.5 mm²) / 20 A (2.5 mm²) (limited by national installation rules)
- Number of mechanisms: 2
- Material housing: stainless steel
- Inlet: one double M20 input with cable glands
- Chemical resistance: tested and approved for use in environments with ammonia levels up to 20 ppm
- Protection degree: IP55 for the combination of a socket outlet and a splashproof mounting box
- Impact resistance: The combination of a Hydro mechanism and a flush- or surface-mounting box has an impact resistance of IK07 with a minimum temperature of -25 °C and a maximum temperature of 55 °C
- Colour: white (mass-dyed, approximately NCS S 0502 - Y50R, RAL 9010)
- Dimensions (HxWxD): 347 x 83 x 68 mm
- Certification marks: KEMA, ÖVE, SEMKO
- Marking: CE

niko

$\frac{h}{2} \sqrt{\frac{16}{250}} \frac{A}{V_{ac}}$ **CE**

Dimensions

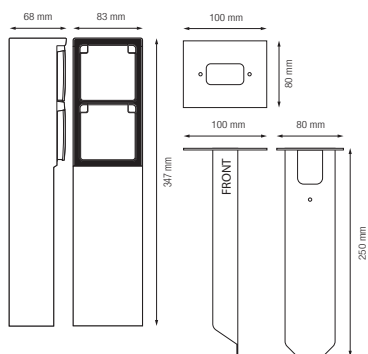

Wiring diagram

